


FSBP1-300-6500-S

Bandpass Filter, 300~6500MHz, 1W, SMA

Electrical Specifications		
1	Center Frequency	3400MHz
2	Pass band Frequency	300~6500MHz
3	Pass band Insertion Loss	≤2.5dB
4	VSWR	≤1.80:1
5	Rejection	≥40dB @ DC~200MHz ≥40dB @7300MHz
6	Power Handling	1W
Environmental Characteristics		
1	Operating Temperature	-45°C~+75°C
Mechanical Characteristics		
1	Connectors	SMA-Female
2	Surface Finishing	Silver Plating
3	Dimensions ¹	40.4*12*10mm [1.59*0.47*0.39in]

Outline Drawing (Units: mm/[inch], Tolerance: ±0.3mm)

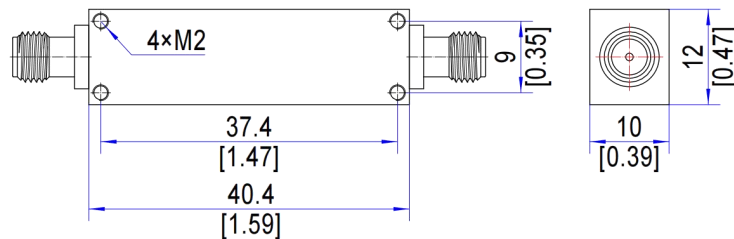

Note 1: Excluding Connector size