


FSBP10-2350-2360-S

Cavity Band Pass Filter, 2305-2315MHz, 10W, SMA

Electrical Specifications		
1	Center Frequency	2355MHz
2	Pass Band Frequency	2350~2360MHz
3	Insertion Loss	≤2.5dB
4	Ripple	≤1.2dB
5	VSWR	≤1.30:1
6	Rejection	≥80dBc@DC~2290MHz ≥80dBc@2330~4610MHz ≥50dBc@4610~6945MHz
7	Power	10W
Environmental Specifications		
1	Operating Temperature	-20 °C ~ +65 °C
2	Environmental Class	Indoor
Mechanical Specifications		
1	Connectors	SMA-Female
2	Surface Finishing	Black Paint
3	Dimensions	141*60*30 mm [5.551*2.362*1.181 in]

Outline Drawing (Units: mm/[inch], Tolerance: ± 2%)

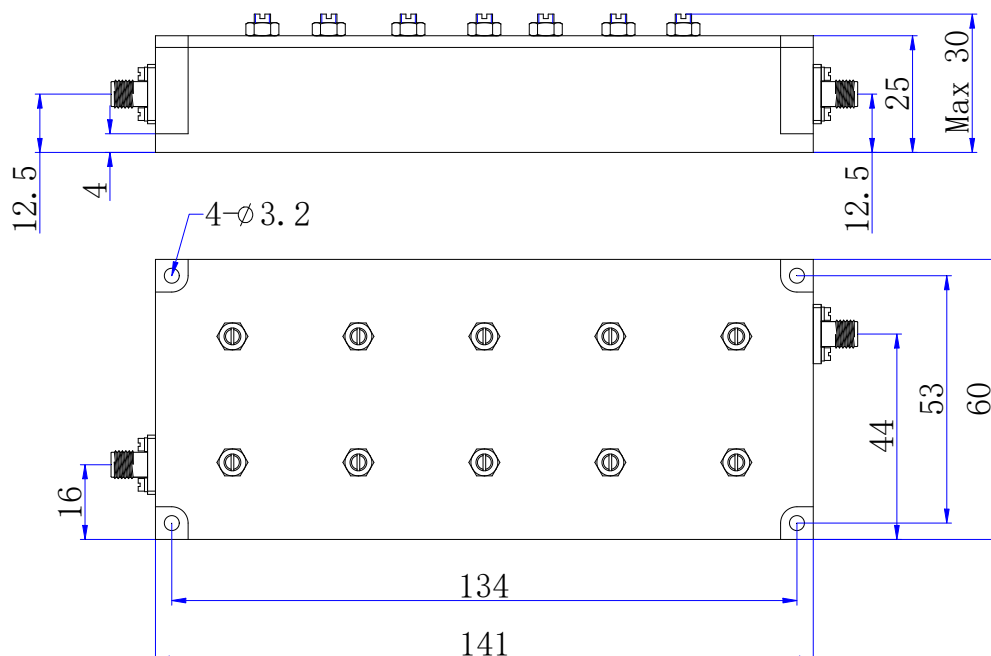

Ordering Information:

Model: FSBP10-2350-2360-S