


FSBP5-6000-12000-S

Bandpass Filter, 6000~12000MHz, 5W, SMA

Electrical Specifications		
1	Center Frequency	9000MHz
2	Pass band Frequency	6000~12000MHz
3	Pass band Insertion Loss	≤1.2dB
4	VSWR	≤1.80:1
5	Rejection	≥45dB@DC~3500MHz ≥35dB@15000MHz
6	Power Handling	5W
Environmental Characteristics		
1	Operating Temperature	-45°C~+75°C
Mechanical Characteristics		
1	Connectors	SMA-Female
2	Surface Finishing	Silver Plating
3	Dimensions ¹	36.5*21*10mm [1.44*0.83*0.39in]

Outline Drawing (Units: mm/[inch], Tolerance: ±0.3mm)

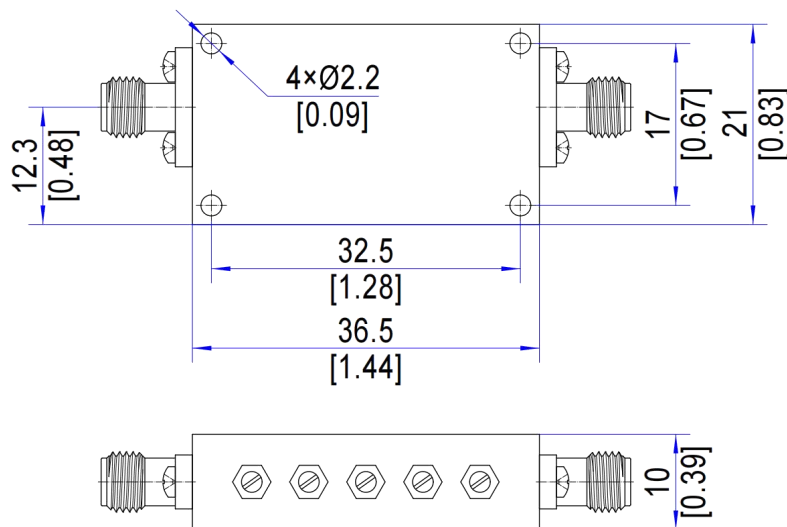

Note 1: Excluding Connector size