


FSCA1-0-2.5-XX-XX

Continuously Variable Attenuator, DC~2.5GHz, 1W

Electrical Specifications		
Impedance	50Ω	
Average Power	1W	
Frequency Range	DC~2.5GHz	
Attenuation Range	0~10dB	0~16dB
Environmental Specifications		
Operating Temperature	-40°C~+65°C	
Mechanical Specifications		
Connectors	SMA-Female, N-Female	
Body Material	Outer Conductor: Nickel Plated Brass	
	Inner Conductor: Gold Plated Beryllium Copper	
	Housing: Aluminum	
Dimension	Outline A: 41*20*38mm, Outline B: 47.5*20*42mm	
Weight	Approx. 65g	

Outline Drawing (Units: mm/[inch], Tolerance: ± 2%)

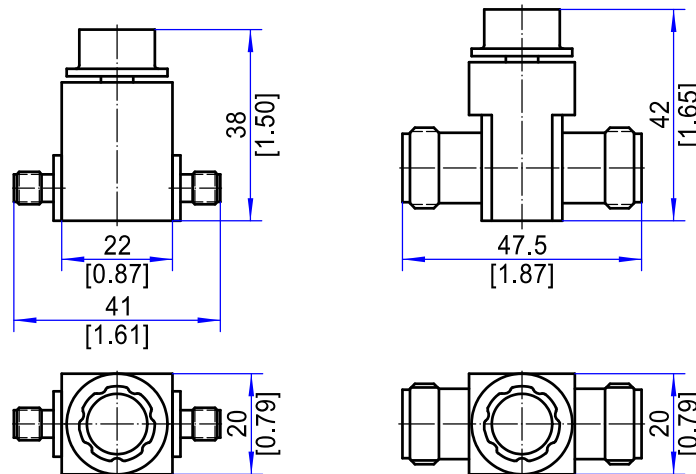

Outline A: SMA

Outline B: N

Ordering Information:

Model: **FSCA1-0-2.5-XX-YY**

XX = Attenuation Range in dB (e.g. 0-10dB→10)

YY = Connector Type (S=SMA-Female, N=N-Female)

Example: 0~16dB, SMA-Female→**FSCA1-0-2.5-16-S**