


FSCT1K-4-N

Coaxial Termination, DC-4GHz, 1000W, N

Electrical Specifications		
1	Nominal Impedance	50 Ω
2	Average Power ¹	1000W @ 25°C
4	Frequency Range	DC~4GHz
5	VSWR	≤ 1.40
Environmental Specifications		
1	Operating Temperature	-55°C~+125°C
Mechanical Specifications		
1	Connectors	N(m)/N(f)
2	Body Material	Connector: Copper-Based Ternary Alloy Plating Heat Sink: Black Anodized Aluminum

Note 1: Refer to the power derating curve for details.

Outline Drawing (Units: mm/[inch], Tolerance: ± 0.3 mm)

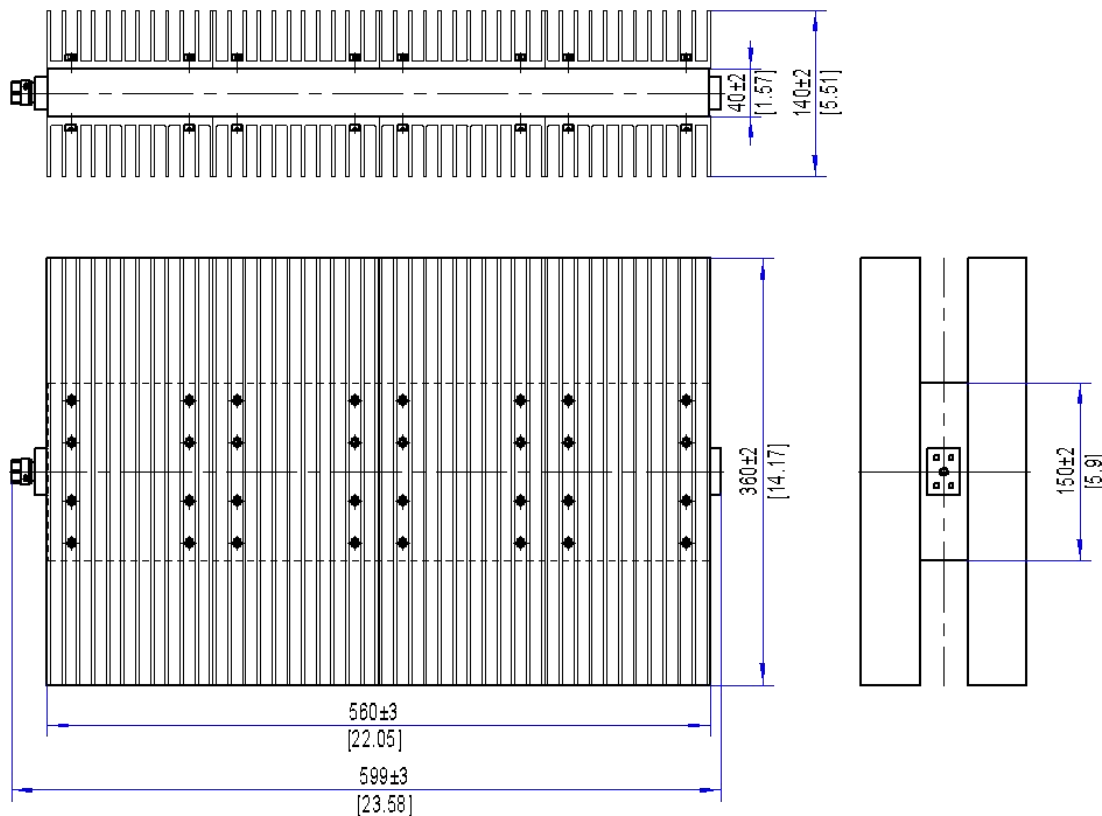

Outline A

Ordering Information:

Model	Connector Type	Outline Drawing
FSCT1K-4-N	N-Female (default)	
FSCT1K-4-NM	N-Male	Outline A