


FSCT200-18-N

Coaxial Termination, DC-18GHz, 200W, N

Electrical Specifications					
1	Nominal Impedance	50 Ω			
2	Average Power ¹	200W @ 25°C			
3	Peak Power	1KW (5 μs pulse width, 10% duty cycle)			
4	Frequency Range	DC~4GHz	DC~8GHz	DC~12.4GHz	DC~18GHz
5	VSWR	≤1.20	≤1.25	≤1.35	≤1.45
Environmental Specifications					
1	Operating Temperature	-55°C~+125°C			
Mechanical Specifications					
1	Connectors	N(m)/N(f)			
2	Body Material	Connector: Copper-Based Ternary Alloy Plating Heat Sink: Black Anodized Aluminum			

Outline Drawing (Units: mm/[inch], Tolerance: ±0.3mm)

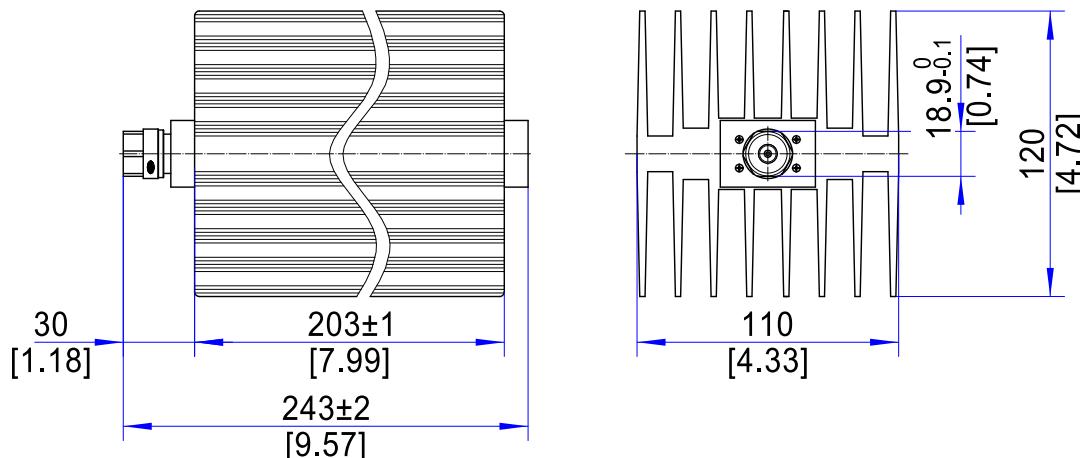

Ordering Information:

Model: **FSCT200-XX-YY**

XX = Frequency Range in GHz (4GHz, 8GHz, 12.4GHz, 18GHz)

YY = Connector Type (N=N-Female, NM= N-Male)

Example: 8GHz, N-Female→**FSCT200-8-N**

Notes

1. Refer to the power derating curve for details.