FSDC20-500-26500-10-S

Single Directional Coupler, 20W, 0.5-26.5GHz, 10dB coupling, SMA(f)

Electrical Specifications		
1	Frequency Range	0.5-26.5 GHz
2	Impedance	50 Ω
3	Coupling	10±1.5 dB
4	Insertion Loss	2.6 dB Max.
5	VSWR	1.60:1 Max. , 1.28:1 Typ.
6	Directivity	10 dB Min.
7	Power Handling	20 W CW
Environmental Specifications		
1	Operating Temperature	-45 °C ~ +85 °C
Mechanical Specifications		
1	Connectors	SMA-Female
2	Surface Finish	Black Paint
3	Dimensions[1]	88.9*17.8*12.7mm [3.5*0.701*0.5in]

Outline Drawing (Units: mm/[inch], Tolerance: ±0.3mm [±0.01in])

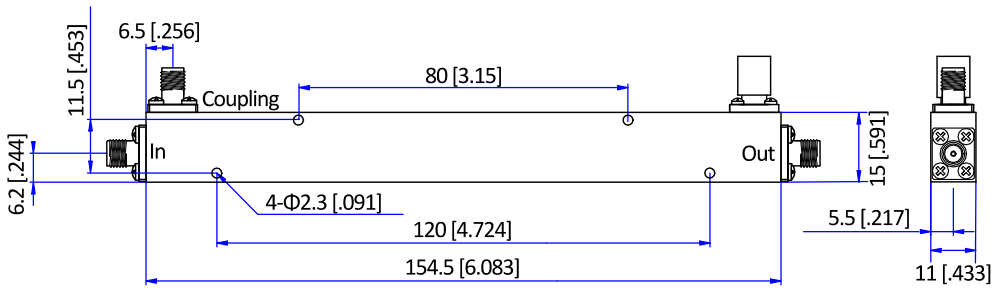

Ordering Information:

Model: **FSDC20-500-26500-10-S**

Note 1: Dimensions are nominal and exclude connectors.