


FSFA10-18-XX-N

Fixed Attenuator, DC-18GHz, 10W, N

Electrical Specifications					
1	Nominal Impedance	50 Ω			
2	Average Power ¹	10W @ 25°C			
3	Frequency Range(GHz)	DC-4	DC-8	DC-12.4	DC-18
4	VSWR	≤1.20	≤1.25	≤1.35	≤1.45
5	Attenuation (dB)	1~60dB			
Environmental Specifications					
1	Operating Temperature	-55°C~+125°C			
Mechanical Specifications					
1	Connectors	N(m) to N(f)-Standard, Polarity Customizable			
2	Body Material	Connector: Copper-Based Ternary Alloy Plating Heat Sink: Black Anodized Aluminum			
Attenuation, Accuracy & Length					
Attenuation (dB)	Accuracy(dB)				L (mm/in)
	DC-4GHz	DC-8GHz	DC-12.4GHz	DC-18GHz	
1~10	±0.4	±0.5	±0.6	±0.6	58/2.28
11~20	±0.5	±0.6	±0.7	±0.8	
21-30	±0.6	±0.8	±0.8	±1.0	
31~40	±0.7	±0.8	±0.9	±1.2	
41~50	±0.8	±0.8	±1.0	±1.3	
51~60	±0.9	±1.0	±1.2	±1.5	

Note 1: Refer to the power derating curve for details.

Outline Drawing (Units: mm/[inch], Tolerance: $\pm 2\%$)

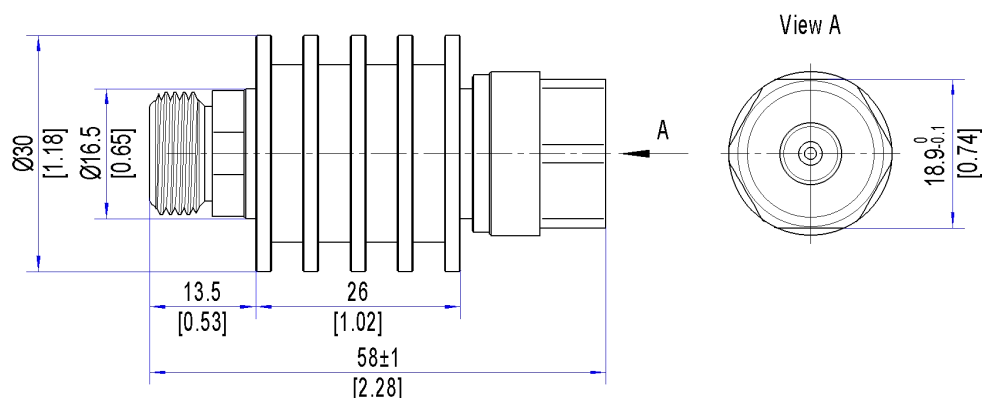

Ordering Information:

Model: **FSFA10-XX-YY-S**

XX = Frequency Range (4GHz, 8GHz, 12.4GHz, 18GHz)

YY = Attenuation Value in dB

Example: 8GHz, 5 dB→**FSFA10-8-5-S**