

FSFA2K-3-XX-L29


Fixed Attenuator, DC~3GHz, 2KW, L29

Electrical Specifications				
1	Nominal Impedance	50 Ω		
2	Average Power ¹	2KW @ 25°C		
3	Peak Power	10KW (5 μs pulse width, 10% duty cycle)		
4	Frequency Range	DC~3GHz		
5	VSWR	≤1.40:1		
6	Attenuation(dB)	20	30	40
7	Accuracy(dB)	/	/	±2.0
Environmental Specifications				
1	Operating Temperature	-55°C~+125°C		
Mechanical Specifications				
1	Connectors	L29(f) to N(f)-Standard, Polarity Customizable		
2	Body Material	Connector: Nickel Plated Brass Heat Sink: Black Anodized Aluminum		
3	Dimensions ²	602*170*410 mm [23.70*6.69*16.14 in]		
4	Weight	30Kg		

Note 1: Power derates linearly to 200W@+125°C. Refer to the power derating curve for details.

Note 2: Excluding Connectors.

Outline Drawing (Units: mm/[inch], Tolerance: $\pm 2\%$)

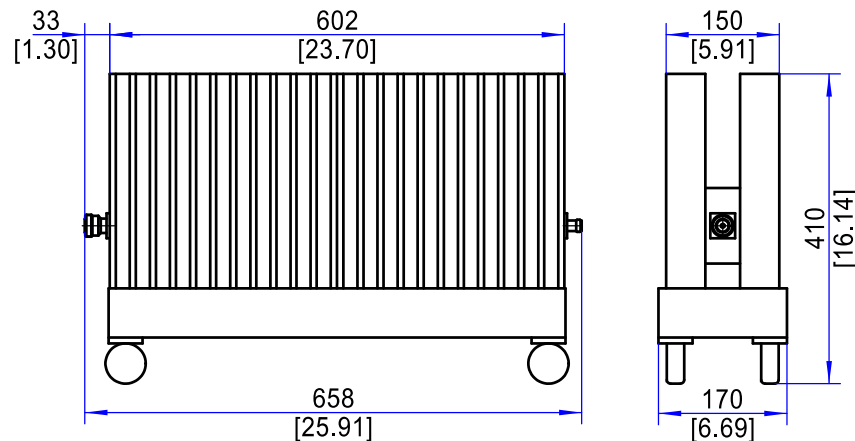

Ordering Information:

Model: **FSFA2K-3-XX-L29**

XX = Attenuation Value in dB

Example: 30 dB→**FSFA2K-3-30-L29**