


FSFA30-18-XX-N

Fixed Attenuator, DC~18GHz, 30W, N

Electrical Specifications					
1	Nominal Impedance	50 Ω			
2	Average Power ¹	30W @ 25°C			
3	Frequency Range	DC~4GHz	DC~8GHz	DC~12.4GHz	DC~18GHz
4	VSWR	≤1.20	≤1.25	≤1.35	≤1.45
Environmental Specifications					
1	Operating Temperature	-55°C~+125°C			
Mechanical Specifications					
1	Connectors	N(m) to N(f)-Standard, Polarity Customizable			
2	Body Material	Connector: Brass Heat Sink: Black Anodized Aluminum			
Attenuation, Accuracy & Dimension					
Attenuation (dB)	Accuracy(dB)				Diemnson (mm/in)
	DC-4GHz	DC-8GHz	DC-12.4GHz	DC-18GHz	
1~10	±0.4	±0.5	±0.6	±0.6	Φ38*105 [Φ1.5*4.13]
20	±0.5	±0.6	±0.7	±0.9	
30	±0.7	±0.8	±0.8	±1.0	
40	±0.7	±0.8	±1.0	±1.2	
50~60	±0.7	±0.8	±1.0	±1.3	

Note 1: Refer to the power derating curve for details.

Outline Drawing (Units: mm/[inch], Tolerance: $\pm 2\%$)

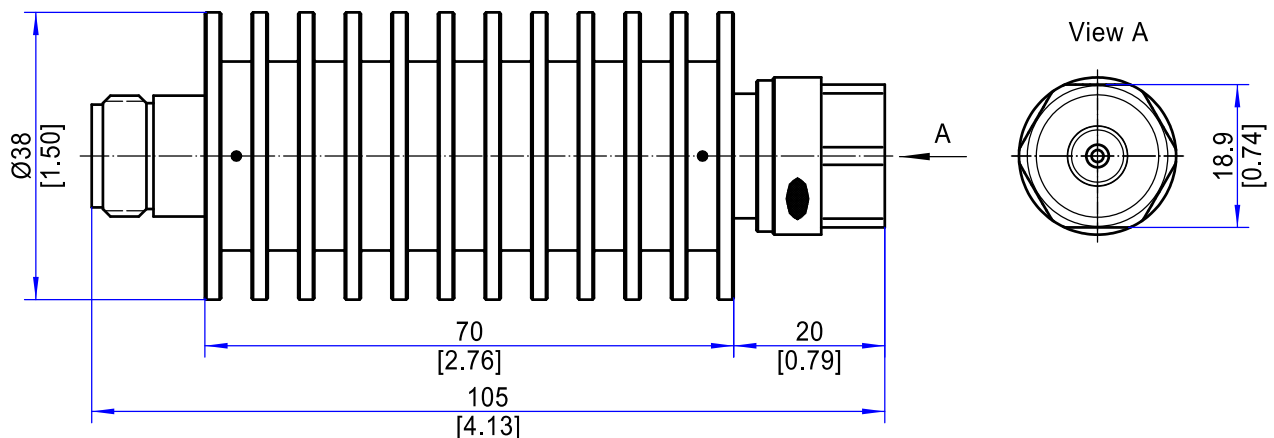

Ordering Information:

Model: **FSFA30-XX-YY-N**

XX = Frequency Range (4GHz, 8GHz, 12.4GHz, 18GHz)

YY = Attenuation Value in dB

Example: 8GHz, 20 dB→**FSFA30-8-20-N**