


FSFA50-18-XX-N

Fixed Attenuator, DC-18GHz, 50W, N

Electrical Specifications					
1	Nominal Impedance	50 Ω			
2	Average Power ¹	50W @ 25°C			
4	Frequency Range	DC-4GHz	DC-8GHz	DC-12.4GHz	DC-18GHz
5	VSWR	≤1.20	≤1.25	≤1.35	≤1.45
Environmental Specifications					
1	Operating Temperature	-55°C~+125°C			
Mechanical Specifications					
1	Connectors	N(m) to N(f)-Standard, Polarity Customizable			
2	Body Material	Connector: Brass Heat Sink: Black Anodized Aluminum			
Attenuation, Accuracy & Dimension					
Attenuation (dB)	Accuracy(dB)				Dimension (mm)
	DC-4GHz	DC-8GHz	DC-12.4GHz	DC-18GHz	
1~10	±0.4	±0.5	±0.6	±0.8	Outline A: Φ64*105 Outline B: 105*110*120
20	±0.5	±0.6	±0.7	±0.9	
30	±0.7	±0.8	±0.8	±1.0	
40~50	±0.7	±0.8	±1.0	±1.2~1.3	

Note 1: Refer to the power derating curve for details.

Outline Drawing (Units: mm/[inch], Tolerance: $\pm 2\%$)

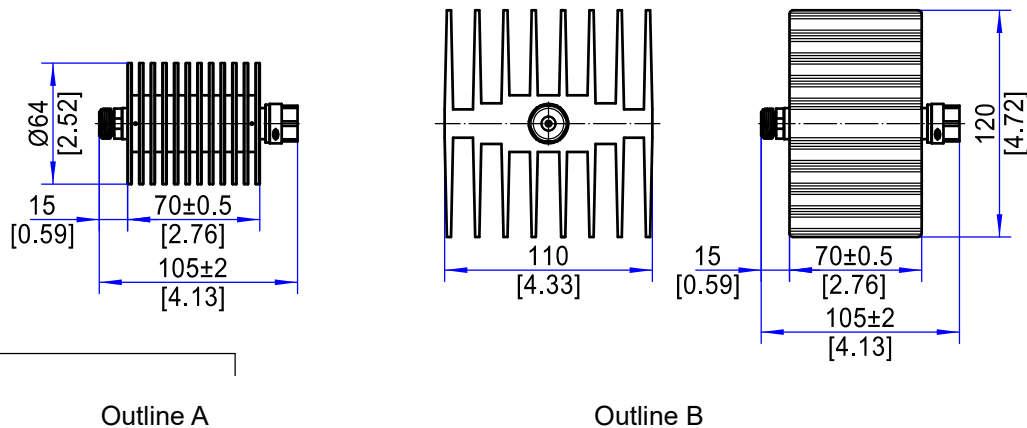

Ordering Information:

Model: **FSFA50-XX-YY-S-Z**

XX = Frequency Range (4GHz, 8GHz, 12.4GHz, 18GHz)

YY = Attenuation Value in dB

Z = Outline Option (C: Cylindrical Heatsink→Outline A, B: Block Heatsink→Outline B)

Example: 8GHz, 10 dB, Cylindrical Heatsink→**FSFA2-8-10-S-C**