


FSLN60-1000-20000-3

Amplifiers, LNA, 1000-20000MHz, Gain 60dB, NF 3dB

Electrical Specifications		
1	Frequency Range	1000~20000MHz
2	Gain	60dB min.
3	Noise Figure	3dB max.
4	P1dB	10dBm min.
5	Input VSWR	2.0:1 max.
6	Operating Voltage	+5V±4%
7	Operating Current	≤300mA
Environmental Specifications≤		
1	Operating Temperature	-40°C~+70°C
2	Storage Temperature	-55°C~+85°C
Mechanical Specifications		
1	Connectors	2.92mm(M) to 2.92mm(F)
2	Dimensions ¹	40*20*8mm [1.57*0.79*0.31in]

Outline Drawing (Units: mm/[inch], Tolerance: ±0.3mm)

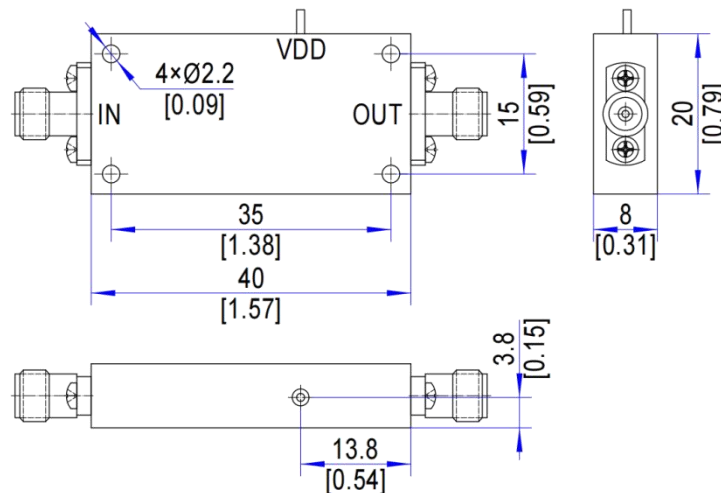

Note 1: Excluding Connectors