


FSOXO-120-155N

Frequency Sources, OCXO Module, 120 MHz, -155dBc/Hz@1kHz

Electrical Specifications			
Output Frequency	120 MHz	Daily Aging Rate ²	±5 ppb/day Max.
Output Waveform	Sine Wave	Annual Aging Rate ²	±0.5ppm/year Max.
Frequency Accuracy ¹	±0.2 ppm Max.	Phase Noise	-155 dBc/Hz Max. @ 1kHz
Output Power	+5 dBm Min.		-160 dBc/Hz Max. @ 10kHz
Spurious	-75 dBc Max.		-160 dBc/Hz Max. @ 100kHz
Harmonic	-30 dBc Max.	Supply Voltage	+12 V DC ± 5%
Temperature Stability	±0.1ppm Max. (at -40°C~+70°C)	Steady-State Current	200mA Max. (at 25±5°C in still air)
		Warm-Up Current ³	400 mA Max.
Environmental Specifications			
Operating Temperature	-40°C~+70°C		
Storage Temperature	-55°C~+105°C		
Mechanical Specifications			
RF Connectors	SMA-Female		
DC/Control Interface	Feedthrough Pins		
Dimensions	57.2x57.2x20 mm [2.25x2.25x0.79 in]		

Outline Drawing (Dimensions in mm [in]; Tolerance: ± 0.3 mm [± 0.01 in])

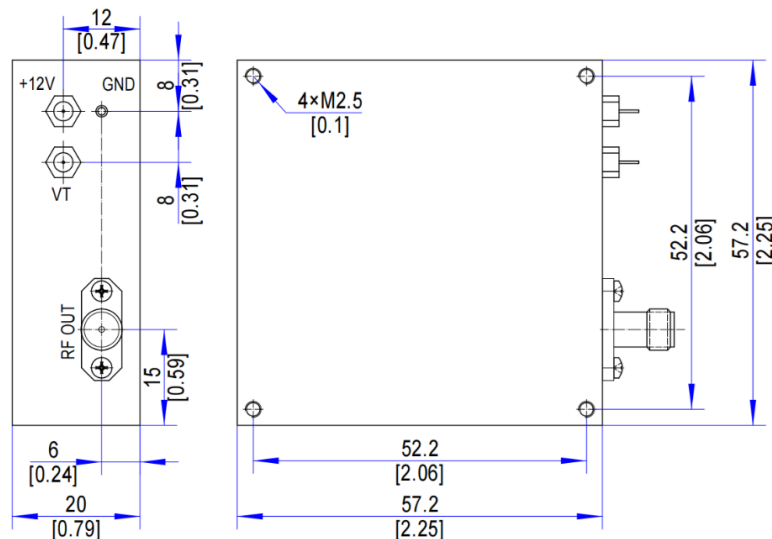

Ordering Information:

Model: **FSOXO-120-155N**

Notes:

1. At $25 \pm 5^\circ\text{C}$, $V_T=5.0 \pm 0.1\text{V}$
2. Aging specifications apply After 14 days of continuous Operation.
3. During the first minute at $25 \pm 5^\circ\text{C}$