


FSBP10-33000-40000-K

Comb Band Pass Filter,33000~40000MHz,10W,2.92mm(f)

Electrical Specifications		
1	Center Frequency	36500MHz
2	Pass Band Frequency	33000~40000MHz
3	Pass Band Insertion Loss	≤1.0dB@36500MHz ≤1.4dB@33000~40000MHz
4	Pass Band Ripple	≤0.6dB
5	VSWR	≤1.29:1
6	Rejection	≥85dB@DC~31200MHz ≥85dB@42000~54000MHz
7	Power	10W Max.
Environmental Characteristics		
1	Operating Temperature	-30°C~+70°C
Mechanical Characteristics		
1	Connectors	2.92mm-Female
2	Surface Finishing	Painted Black
3	Dimensions ¹	80*16*8mm [3.15*0.63*0.31 in]

Outline Drawing (Units: mm/[inch], Tolerance: ±0.3mm)

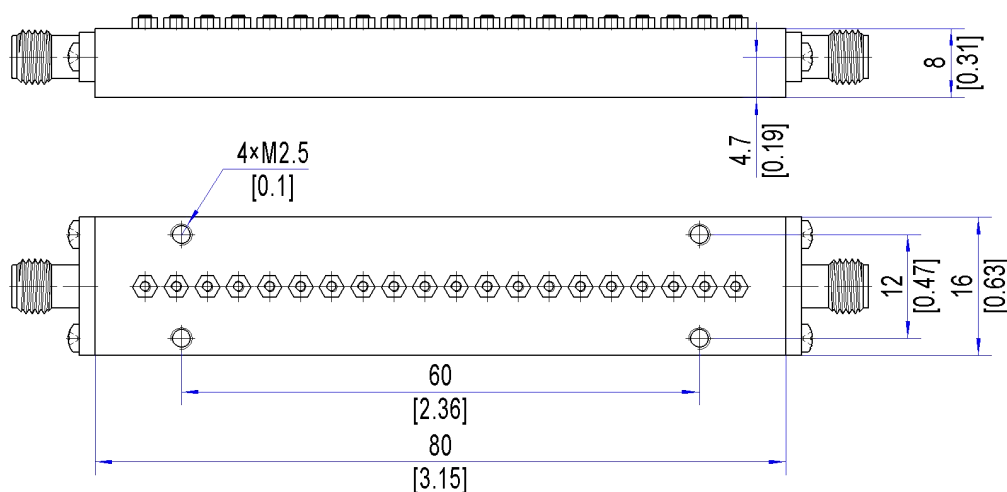

Note 1: Excluding Connectors