


FS500AX

26.5GHz, 50 Ohm, Φ 5.4mm, PFA Jacket, Flexible Cable. Solid Inner Conductor

Structure:

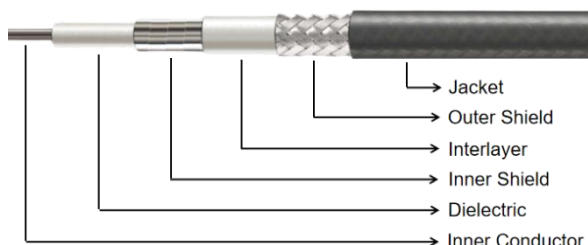

Structure Details:

Cable Type	Dia.(mm)	Material
Inner Conductor	1.45	Silver plated Copper
Dielectric	3.99	Low Density PTFE
Inner Shield	4.19	Silver Plated Copper Strip
Interlayer	4.45	Low Density PTFE
Outer Shield	4.85	Silver Plated Copper Braid
Jacket	5.40	FEP

Electrical Specifications:

Operating Freq.: 26.5 GHz

Cut-off Freq.: 29 GHz

Impedance: 50 Ω

Velocity of Propagation: 83%

Shielding Effectiveness: >90 dB

Dielectric Withstanding Voltage: 1500 V DC

Passive Intermodulation (PIM): -155dBc

Phase Change vs Temperature: <750PPM@-55~+85 °C

Mechanical Specifications:

Static Bending Radius: 27 mm

Dynamic Bending Radius: 54 mm

Weight: 63 g/m

Environmental Specifications:

Temperature: -55~+165 °

Typical Attenuation(dB/100m) and Power handling (W)

Freq.(GHz)	1	2	3	6	8	10	12.4	18	26.5
Attenuation ¹	23.4	33.3	41.0	58.5	67.9	76.3	85.4	103.8	127.5
Avg. Power ²	1128	793	645	451	389	346	309	254	207
K1: 0.730000, K2: 0.000328									

1: Typical value@+25 °C,VSWR=1.0;

2: Typical value@+40 °C,VSWR=1.0,Sea Level;

3: Typical Cable Attenuation Calculation Formula: $K1 \cdot \sqrt{F(\text{MHz})} + K2 \cdot F(\text{MHz})$;

4: Typical Connector Attenuation Calculation Formula: $0.03 \cdot \sqrt{F(\text{GHz})}$.

Cable Assemblies Naming Rule:

PN: Cable-Max. Freq.-Conn.1-Conn.2-Length(m)

Eg.: FS500A1-26.5-SM-SF-1 means FS500A1 cable, DC-26.5GHz, SMA(m)-SMA(f), 1m.

Add "R" for right-angle or "H" for bulkhead after the connector code (e.g., NMR, NFH)

Connectors Options	Frequency (Max)	VSWR (Max)	Body Material
2.92mm (K)	26.5GHz	1.30:1	Passivated Stainless Steel
3.5mm (3)	26.5GHz	1.30:1	
SMA (S)	26.5GHz	1.30:1	
N (N)	18GHz	1.25:1	
TNC (T)	18GHz	1.25:1	